

SD 300
SD 350
SD 420

150-300 kW
220-350 kW
200-420 kW



Oil Burner


- Energy saving and compatible with environmental requirements
- Quiet in operation and designed for easy maintenance
- Reliable and trouble-free
- Tube firing option
- Compact design
- Plug-in contact facilitates the installation
- Ducted or conventional air inlet
- 1 stage or 2 stage options
- Robust construction for industrial process applications (kilns, ovens, etc.)



For more information on all Nu-way products
please visit www.nu-way.co.uk


Enertech Group

Type		SD 300	SD 350	SD 420
	kW	150-300	220-350	200-420
Motor	V/Hz	230/50	230/50	230/50
Control unit		Automatic	Automatic	Automatic
Fuel pump		Danfoss	Danfoss	Danfoss
2 –Stage		✓	✓	✓
Gross weight	kg	-	-	-
Volume	m ³	-	-	-

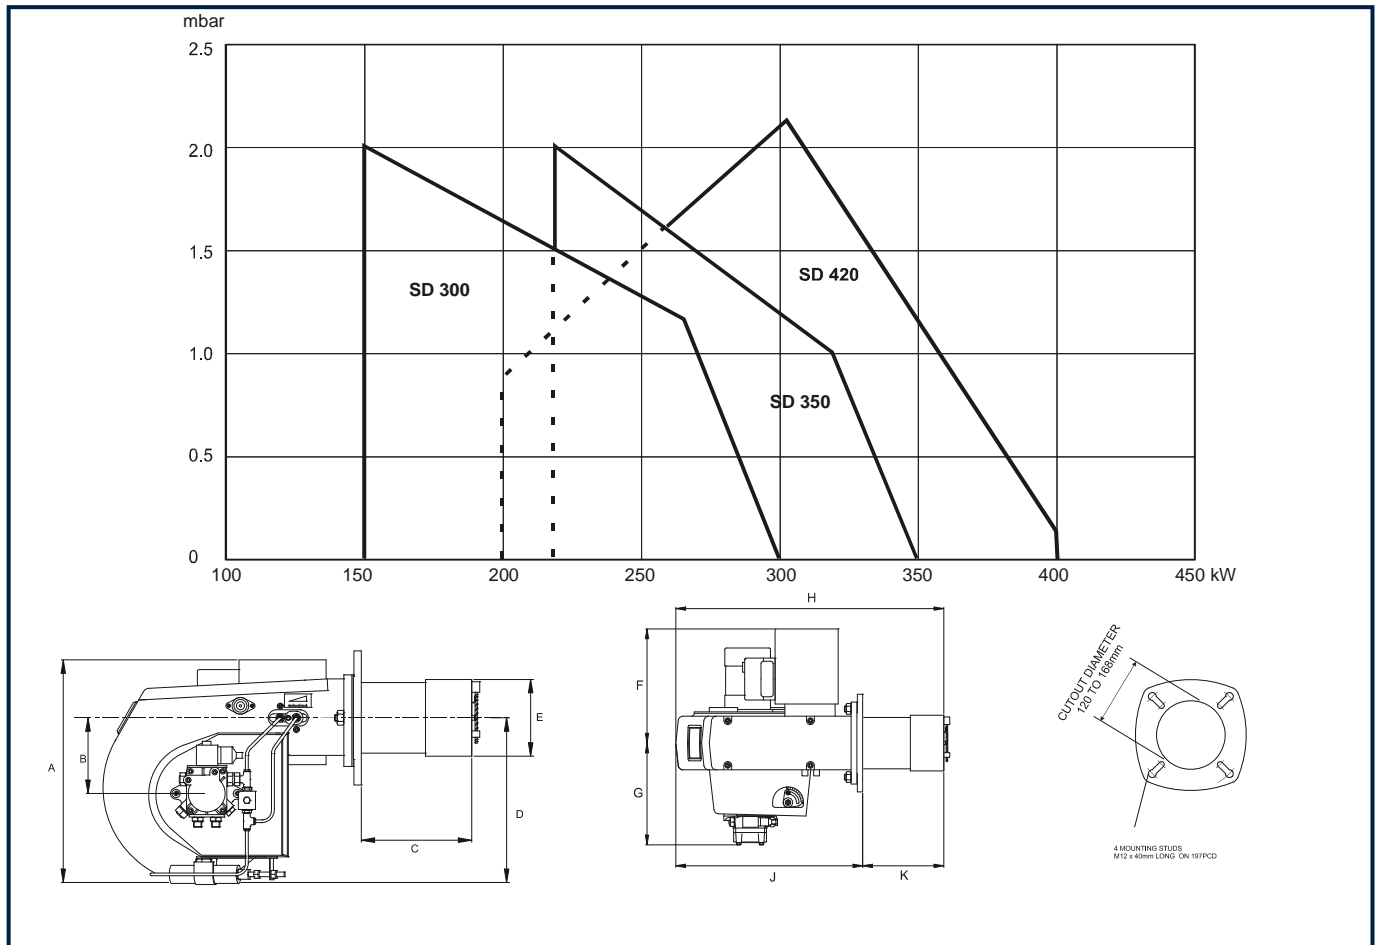

	A	B	C	D	E	F	G	H	J	K
SD 300	330	115	165	245	105	235	210	565	385	180
SD 380	330	115	165	245	114	235	210	550	385	165
SD 420	330	115	165	245	114	235	210	550	385	165

Subject to alterations in design.